


TECHNICAL SPECIFICATION

FABRIC-BACKED VINYL WALLCOVERING

Product Shadow Silk

This design has a band of contrasting colour running across the width - repeated every 60cm vertically. This is not designed to be matched up from one drop to the next. The result is a panelled effect as shown below.

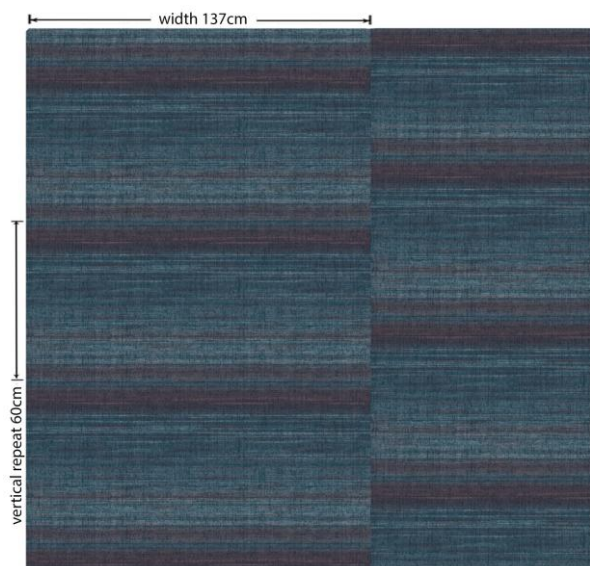

Description Commercial quality vinyl wallcovering laminated onto a woven polycotton backing.

Weight 450 grammes per square metre.

Roll Size 137cm x 27m

Fire Rating Euroclass C / Class 0 and 1 to BS476 part 6 and 7

Adhesive Generally Tekfix Plus, though depends on substrate. Tekfix VOV should be used when installing around right angled corners.

Hanging Care should be taken during installation in order to produce optimum results. Apply adhesive to wall surface. Carefully smooth wallcovering onto wall surface using a spatula, allowing 5-10cm at top and bottom for trimming. Overlap lengths and double cut through. Run seam roller up join to ensure even adhesion. Remove any adhesive seepage *immediately* with detergent solution and clean water. Rinse thoroughly. Do not reverse alternate lengths. Random match. Shadow Silk has a band of colour repeated every 60cm vertically. This is **not** designed to be matched up from one drop to the next, and will create a panelled effect. See visual above.

Maintenance Fabric-backed vinyls offer an easy-clean finish, and high resistance to knocks and scrapes. They are designed to withstand high traffic levels, and will not tear easily. With regular cleaning they will retain their original appearance for many years depending on area of use.

Always carry out a trial in an inconspicuous area first, to ensure cleaning agent suitable. Clean with a mild non-soapy detergent with soft cloth, sponge or soft bristle brush to prevent build up of dirt and staining. Avoid polishes and abrasive cleaning agents as they will cause build up of dirt in the surface texture, and can also damage metallic finishes. Avoid strong active solvent cleaners as they can stain and damage the vinyl surface. Always clean from the skirting level upwards. Rinse thoroughly with clean water. Individual stains should be

removed as quickly as possible. This wallcovering contains antimicrobials which guard against mildew and bacterial growth.

Health & Safety

This product is classified as non-hazardous and therefore does not require any special handling. This product does not require special labelling.

Handling/Storage

Store at ambient temperatures away from heat source. Suitable lifting equipment may be required.

Fire Fighting

Any extinguishing media are suitable. Wear self contained breathing apparatus, protective clothing and full face mask. Fumes should be ventilated immediately due to possible liberation of noxious gases.

Ecological

This product is not bio-degradable. Dispose of in accordance with Local Authority regulations or via an authorised contractor.

TEKTURA
WALLCOVERINGS

TEKTURA PLC, Suite 1.03 Harbour Island, 34 Harbour Exchange Square, London E14 9GE
Tel 020 7536 3300 Fax 020 7536 3322